713-00

A

PTO/SB/05 (4/98)
Approved for use through 09/30/2000. OMB 0651-0032
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Please type a plus sign (+) inside this box → [+]

UTILITY
PATENT APPLICATION
TRANSMITTAL

(Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))

Attorney Docket No.	32809
First Inventor or Application Identifier	Kenji Shimazaki
Title	METHOD OF ANALYZING ELECTROMAGNETIC...
Express Mail Label No.	EL633643636US

APPLICATION ELEMENTS
See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO:
Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

1. [X] **Fee Transmittal Form** *(e.g., PTO/SB/17)*
   (Submit an original and a duplicate for fee processing)

2. [X] **Specification** [Total Pages [32]]
   (preferred arrangement set forth below)
   - Descriptive title of the Invention
   - Cross References to Related Applications
   - Statement Regarding Fed sponsored R & D
   - Reference to Microfiche Appendix
   - Background of the Invention
   - Brief Summary of the Invention
   - Brief Description of the Drawings *(if filed)*
   - Detailed Description
   - Claim(s)
   - Abstract of the Disclosure

3. [X] **Drawing(s)** *(35 U.S.C. 113)* [Total Sheets [22]]

4. **Oath or Declaration** [Total Pages [3]]
   a. [X] Newly executed (original or copy)
   b. [ ] Copy from a prior application (37 C.F.R. § 1.63(d))
      (for continuation/divisional with Box 16 completed)
      i. [ ] DELETION OF INVENTOR(S)
         Signed statement attached deleting
         inventor(s) named in the prior application,
         see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).

*NOTE FOR ITEMS 1 & 13: IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY
FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT
IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28).*

5. [ ] Microfiche Computer Program *(Appendix)*

6. [ ] Nucleotide and/or Amino Acid Sequence Submission
   (if applicable, all necessary)
   a. [ ] Computer Readable Copy
   b. [ ] Paper Copy (identical to computer copy)
   c. [ ] Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

7. [X] Assignment Papers (cover sheet & document(s))

8. [ ] 37 C.F.R.§3.73(b) Statement [X] Power of
   (when there is an assignee) [X] Attorney

9. [ ] English Translation Document *(if applicable)*

10. [X] Information Disclosure [X] Copies of IDS
    Statement (IDS)/PTO-1449 [X] Citations

11. [ ] Preliminary Amendment

12. [X] Return Receipt Postcard (MPEP 503)
    (Should be specifically itemized)

13. [ ] **Small Entity** [ ] Statement filed in prior application,
    Statement(s) [ ] Status still proper and desired
    (PTO/SB09-12)

14. [X] Certified Copy of Priority Document(s)
    (if foreign priority is claimed)

15. [X] Other: Check for $730.00 ....
    ....

16. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment:
   [ ] Continuation   [ ] Divisional   [ ] Continuation-in-part (CIP)   of prior application No: _____/_____
   Prior application information: Examiner _____   Group / Art Unit: _____
   For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied
   under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by
   reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

17. CORRESPONDENCE ADDRESS

[X] Customer Number or Bar Code Label [000,116]   or [ ] Correspondence address below
   (Insert Customer No. or Attach bar code label here)

Name	David E. Spaw
	Pearne & Gordon LLP
Address	526 Superior Avenue East
	Suite 1200
City	Cleveland	State	Ohio	Zip Code	44114-1484
Country	U.S.A.	Telephone	216-579-1700	Fax	216-579-6073

Name (Print/Type)	David E. Spaw	Registration No. (Attorney/Agent)	34732
Signature	*(signature)*	Date	7/13/00

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any
comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office,
Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents,
Box Patent Application, Washington, DC 20231.

PEARNE & GORDON LLP
526 Superior Avenue East
Suite 1200
Cleveland Ohio 44114-1484
(216) 579-1700

Attorney Docket No. 32809

Assistant Commissioner for Patents
Box PATENT APPLICATION
Washington, D.C. 20231

Sir:

Transmitted herewith for filing by other than a small entity is the patent application of:

Inventor:	Kenji Shimazaki, Hiroyuki Tsujikawa, Seijirou Kojima, and Shouzou Hirano
For:	METHOD OF ANALYZING ELECTROMAGNETIC INTERFERENCE

22 sheets of informal drawings are included.

An assignment of the invention to Matsushita Electric Industrial Co., Ltd. is included along with a Recordation Form Cover Sheet. Please record and return the assignment to the undersigned.

Priority is claimed under 35 U.S.C. §119 on the basis of the following foreign applications:

Japanese Patent Application No. Hei. 11-200847 Filed July 14, 1999

A certified copy of this application is enclosed.

An Information Disclosure Statement is enclosed.

"Express Mail" mailing label number EL633643636US

Date of Deposit   7/13/00

I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 C.F.R. § 1.10 on the date indicated above and is addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231.

Paula Almasy
Printed Name of Person Mailing Paper or Fee

Signature of Person Mailing Paper or Fee

CLAIMS AS FILED

| For	Number		Rate	Fees
Total claims in excess of 20:	0	×	$18.00	$0.00
Independent claims in excess of 3:	0	×	$78.00	$0.00
Multiple dependent claims, if any, add surcharge of $260.00:				$.00
Non English Specification, add surcharge of $130.00:				$.00
			Basic Fee	$690.00
			TOTAL FILING FEE	$690.00
Assignment Recordal Fee of $40.00				$40.00
			TOTAL FEE	**$730.00**

A check in the amount of the Total Fee calculated above is enclosed.

The Commissioner is hereby authorized to charge any fees under 37 C.F.R. §§1.16 and 1.17 which may be required during the entire pendency of this application, or to credit any overpayment, to Deposit Account No. 16-0820, Order No. 32809.

Respectfully,

PEARNE & GORDON LLP

David E. Spaw, Reg. No. 34732

Date: July 13, 2000

METHOD OF ANALYZING ELECTROMAGNETIC INTERFERENCE

Background of the Invention

1.Field of the Invention

5   The present invention relates to a method of analyzing

electromagnetic interference (EMI) (hereinafter often

referred to as an "EMI analysis method"), and more particularly,

to a method of analyzing electromagnetic interference arising

in a large-scale, high-speed LSI (large-scale integrated

10   circuit) by means of high-speed, highly-accurate logic

simulation.

2.Description of the related Art

      LSIs find a broadening range of applications, from

communications devices, such as cellular phones, to general

15   household products, toys, and automobiles, as well as

applications in the field of computers. Electromagnetic

interference arising in such a product induces radio

interference noise in a receiver, such as a TV set or a radio,

or faulty operations of another system. In order to prevent

20   this problem, the entirety of a product is shielded, or filters

are provided in a product. With a view towards preventing an

increase in the number of components and cost and difficulty

in preventing occurrence of electromagnetic interference in

a product, strong demand exists for suppression of noise in

25   an LSI itself.

Under such a situation, an LSI is ranked as a key device for any product which contains an LSI. Demand exists for an larger-scale, high-speed LSI for ensuring competitiveness of a product. In a situation in which the cycle of product
5 development becomes shorter, design-automation of an LSI is indispensable for satisfying the demand. There is growing necessity for adopting synchronous circuit as a condition for introducing a state-of-the-art design-automation method. In a case where all circuits of a large-scale, high-speed LSI
10 operate synchronously with a reference clock signal, instantaneously-changing current becomes very large and induces an increase in electromagnetic interference.

The present invention relates to a simulation method which enables evaluation of EMI indispensable for reducing
15 electromagnetic interference while maintaining a tendency toward a larger-scale, higher-speed LSI.

Noise imposed on another device by an LSI is roughly classified into two types; radiation noise, and conduction noise. Radiation noise emanated directly from an LSI includes
20 noise emitted from internal wires of an LSI. However, internal wires do not act as an antenna of large size. As a matter of course, it is considered that the noise emitted directly from an LSI will pose a problem in the future, in association with an improvement in the operation frequency of an LSI. However,
25 as of now, the noise emitted from the inside of an LSI is

2

considered trivial.

In contrast, conduction noise affects another device mounted on a printed board, by way of direct interconnections,

5 such as wires of an LSI or routings provided on a printed wiring board. Noise is emitted from such interconnections while the interconnections are act as the source of origination or as an antenna. The antenna constituted of the interconnections is much larger than that constituted by internal wires of an

10 LSI and is a dominant element in terms of electromagnetic emission.

A power line and a signal line can act as paths along which conduction noise developing in an LSI travels. In consideration of an electromagnetic field in the vicinity of

15 an LSI, noise which results from variation in an electric current of a power source being emitted from a power line serving as an antenna is considered to be dominant. There may be a case where ringing and overshoot phenomena stemming from variation in a signal pose problems. However, there more

20 frequently arises a case where variation in an internal power level of an LSI propagates as a signal waveform, to thereby present a problem. Noise emitted from a power line or a signal line is considered to have a strong correlation with variation in the electric current of a power source (hereinafter referred

25 to as a "source current").

3

A source current of a CMOS circuit will now be described
by reference to a simple inverter circuit. In a case where
variation arises in a voltage applied to an inverter circuit,
there flows a load capacity charge/discharge current, which
5   is the primary source current of the CMOS circuit. In addition,
a short circuit current flows together with the load capacity
charge/discharge current. In design of such a CMOS circuit,
all circuits of an LSI are synchronized in accordance with
constraints on the use of a design-automation tool. As a result
10 of all circuits being synchronized, all circuits of the LSI
operate simultaneously, and a peak current arises in a power
source in synchronism with a reference clock signal. Further,
in order to increase operating speed, or shorten a cycle, of
the LSI, the capacity of a transistor is increased so as to
15 enable a charging/discharging operation to be completed within
a short period of time. Eventually, a peak current increases.
As a matter of course, the total source current of an LSI is
increased when the level of an LSI is increased. Thus, the
peak current of the power source is increased, thereby inducing
20 occurrence of an abrupt change in a source current. Such an
abrupt change induces an increase in higher harmonic components,
thereby resulting in an increase in electromagnetic
interference.

    Highly-precise simulation of change in a source current,
25 which may be said to primarily account for electromagnetic

4

interference, is considered to be effective in evaluation of electromagnetic interference arising in an LSI.

A current simulation method for effecting transistor-level current analysis, as will be described below, has conventionally been employed.

FIG. 15 is a block diagram showing the flow of processing operations pertaining to a conventional transistor-level EMI analysis method. According to this method, on the basis of layout information pertaining to an LSI which is to be analyzed through use of a transistor-level current analysis method, there is performed layout parameter extraction (hereinafter referred to as simply an "LPE") processing O3. Subsequently, there is performed circuit simulation O6 regarding a switch-level netlist; source-of-current modeling O8; a power line LPE step O10; transient analysis simulation O12; and FFT processing O14.

Processing pertaining to each of the foregoing processing steps will now be described by reference to FIG. 15.

First, in step O3 are input layout data O1 pertaining to a semiconductor integrated circuit to be subjected to EMI analysis; parameters of elements, such as transistor elements or various parasitic wiring elements (e.g., resistors and capacitors); and an LPE rule O2 for defining a form in which extracted layout parameters are to be output. In accordance

with the LPE rule O2, parameters of the respective elements included in the layout data O1 are calculated, whereby a netlist O4 is produced. In step O3, parasitic elements of a power source (and the ground) are not objects of extraction.

5   In step O6 are input the netlist O4 prepared in step O3 and a test pattern O5 for causing a circuit, which serves as an object of analysis, to replicate a desired logic operation. There are calculated a load capacity charge/discharge current and a short circuit current, which correspond to the operating

10   state of an internal circuit, thereby producing current waveform information O7 concerning the waveform of an electric current of a transistor. The first operation of the processing pertaining to step O6 is effected on the assumption that the potential of a power source (and that of ground) is a

15   variation-free, ideal potential.

In step O8 is entered the current waveform information O7 concerning a transistor prepared in step O6. The thus-entered current waveform information O7 is modeled into a mode which can be applied to subsequent step O12, wherewith current

20   source element model information O9 is prepared. In order to alleviate a load which would be imposed on subsequent step O12, a function circuit block consisting of a plurality of transistors is usually modeled as a single current-source element.

25   Processing pertaining to step O10 differs from

6

processing pertaining to step O3, only in that rather than parameters of transistor elements and those of various parasitic wiring elements, parameters of parasitic elements of a power source and those of a ground wire (e.g., resistors,

5 decoupling capacitance, and like elements) are taken as objects of extraction. Hence, repeated explanation is omitted. In step O10, a power source (and ground) wiring netlist O11 is produced.

In step O12 are entered the current source element model

10 information O9 prepared in step O8, the power source (and ground) wiring netlist O11 prepared in step O10, and impedance O16 of a wire or a lead frame (including, resistance, capacitance, and inductance). Through analysis of these input data carried out by a transient analysis simulator typified

15 by SPICE, fluctuations in line voltage of a circuit to be analyzed are calculated. Thus, there is produced a line voltage drop result O17 concerning the thus-calculated fluctuations in line voltage.

Subsequently, processing pertaining to step O6 is

20 performed again. In contrast with the first operation of the processing pertaining to step O6 having been effected on the assumption that the potential of the power source (and the ground) is a fluctuation-free, ideal potential, the line voltage drop result O17 prepared in step O12 is entered. The

25 current waveform information O7 concerning a transistor is

7

prepared again in consideration of fluctuations in line voltage. Similarly, processing pertaining to steps O8 and O12 is repeated.

Processing pertaining to steps O6, O8, and O12 is effected several times in a looped manner, wherewith there is produced a current waveform result O13 which highly-accurately duplicates fluctuations in line voltage.

In step O14, the current waveform result O13 prepared in step O12 is entered and subjected to fast Fourier transformation (hereinafter abbreviated FFT), to thereby enable frequency spectrum analysis. There is obtained an EMI analysis result O15.

In the conventional example, the precision of verification varies greatly according to combination of the LPE processing O3, the power line LPE processing O10, and the source current modeling processing O8. However, a certain level of accuracy of analysis can be expected. A transient analysis simulator typified by SPICE is used for transistor-level analysis of an electric current. Hence, a limitation is imposed on the level of a circuit to be analyzed, and an enormous amount of processing time is required. The level of a semiconductor integrated circuit has increased recently, and establishment of an EMI analysis method which enables high-speed analysis of an electric current on a level larger than a transistor level is desired.

8

A gate-level current analysis method has conventionally been proposed as a current analysis method which can be made faster. This gate-level current analysis method is used for analyzing power consumption. One example of a gate-level
5   current analysis method is EMI-noise analysis which is to be effected in an ASIC design environment. The method is described in "EMI-Noise Analysis Under ASIC Design Environment" (ISPD&99, pp. 16 through 21). According to this technique, an event is acquired from the result of a gate-
10   level simulation using a test vector, and the waveform of an electric current is estimated. The frequency of the thus-estimated current waveform is analyzed through fast Fourier transformation (FFT). More specifically, as shown in FIG. 16, a logic simulation 104 is effected on the basis of a netlist
15   101 and a test vector 102, wherewith event information 105 is calculated. On the basis of the thus-calculated event information 105 and waveform information 103 obtained at the time of toggling, processing pertaining to a current waveform calculation section 107 is executed, to thereby produce a
20   current waveform calculation result 108. This current waveform calculation result 108 is subjected to FFT processing 109, to thereby produce a frequency characteristic 110. The EMI-noise analysis method can effect an EMI analysis operation faster than that performed according to the conventional gate
25   - level EMI analysis method. However, use of a test vector

9

still involves consumption of much execution time. Therefore, the processing speed achieved by the EMI-noise analysis method is not sufficiently high, and demand still exists for an increase in processing speed of the EMI-noise analysis method.

5 The EMI-noise analysis method also encounters a problem of an analysis result being dependent on the pattern of an employed test vector.

As mentioned above, the conventional example using the

10 transistor-level current analysis method can be expected to yield a certain level of accuracy. However, a transient analysis simulator typified by SPICE is used for transistor-level current analysis. A limitation is imposed on the level of a circuit to be analyzed, and an enormous amount

15 of processing time is required. The level of a semiconductor integrated circuit has increased recently, and there is desired establishment of an EMI analysis method which enables high-speed analysis of an electric current at a scale larger than the scale which can be analyzed by a transistor-level

20 simulator.

The gate-level simulation using a test vector has also been proposed. However, the example conventional gate-level simulation technique encounters difficulty in increasing the speed of analysis. Since the gate-level simulation technique

25 employs a test vector, an analysis result is dependent on the

employed test pattern.

Summary of the Invention

The present invention has been conceived to solve the
drawbacks of the conventional methods and is aimed at

5   evaluating electromagnetic interference developing in an LSI
through a simulation by means of high-speed, highly-accurate
analysis of a power-supply current.

To this end, the present invention provides a method of
analyzing electromagnetic interference (an EMI analysis

10 method). In contrast with a known dynamic gate-level
simulation method, the EMI analysis method enables estimation
of EMI noise, by means of calculating signal propagation of
each node through use of the signal propagation probability
technique, and calculating variation time of each node through

15 use of "the Static timing analysis technique". In short, the
present invention is characterized in calculating a frequency
characteristic from the relationship between toggle
probability of each node and delay in each node.

More specifically, the present invention provides a

20 method of analyzing electromagnetic interference generating
in an LSI, comprising:

a correction step of correcting the amplitude of a
current estimation waveform in each node which has been
previously prepared for each change in each node, in accordance

25 with the probability of variation in each node;

11

an addition step of adding current waveforms of all nodes together within a period of time corresponding to one cycle, provided that the thus-corrected current waveform appears at a time a signal arrives at each node; and

5   a frequency analysis step of analyzing the frequency of the current waveform calculated in the addition step.

The probability of variation in each node is calculated through use of the signal propagation probability technique. Further, the time at which a signal arrives at each node is

10   calculated through use of the static timing analysis technique. The time at which a signal arrives is defined so as to fall within the range between the maximum time and the minimum time, in accordance with an average time, the maximum time, the minimum time, or a predetermined distribution such as a normal

15   distribution.

Preferably, in the correction step, the amplitude of a current estimation waveform, which has been prepared for each change in each node, is corrected in accordance with the probability of variation in each node and a distribution with

20   respect to time (hereinafter called "chronological distribution").

More specifically, the probability of change in each node is calculated through use of the signal propagation probability technique, and the chronological distribution at which a signal

25   arrives at each node is calculated through use of the static

12

timing analysis technique.

Preferably, each node has a plurality of paths, and a current waveform is calculated in consideration of a case where each of the paths has a unique probability of change and signal
5   arrival time.

Further, the present invention provides a method of analyzing electromagnetic interference developing in an LSI, the method comprising:

a waveform formation step of forming a current estimation
10 waveform which has been prepared for each change in each node, as if the waveform randomly arises within a plurality of predetermined cycles, in accordance with the probability of change in each node and a time at which a signal arrives at each node;

15 adding the thus-prepared current estimation waveforms of all nodes, to thereby derive a current waveform; and

analyzing the frequency of the current waveform, thereby determining a noise characteristic of EMI.

In other words, under the EMI analysis method according
20 to the present invention, the probability of change in each node is calculated through use of the signal propagation probability technique, and the result of calculation is stored as a probability at which a signal randomly changes. Further, a time at which a signal arrives at each node is calculated
25 through use of the static timing analysis technique.

13

Moreover, the present invention provides a method of analyzing electromagnetic interference developing in an LSI, the method comprising:

a waveform formation step of forming a current estimation waveform which has been prepared for each change in each node, as if the waveform randomly arises within a plurality of predetermined cycles, in accordance with the probability of change in each node and chronological distribution probability;

adding the thus-prepared current estimation waveforms of all nodes, to thereby derive a current waveform; and

analyzing the frequency of the current waveform, thereby determining a noise characteristic of EMI.

More specifically, the probability of change in each node is calculated through use of the signal propagation probability technique, and the result of calculation is stored as the probability of a signal changing randomly. A chronological distribution at which a signal arrives at each node is calculated through use of the static timing analysis technique.

Preferably, each node has a plurality of paths, and a current waveform is calculated in consideration of a case where each of the paths has a unique probability of change and signal arrival time.

Brief Description of the Drawings

FIG. 1 is a schematic illustration for describing the

14

concept of the present invention;

FIG. 2 is a block diagram showing a portion of a circuit used in a first embodiment of the present invention;

FIGS. 3A and 3B are graphs showing waveforms of signals arriving at the respective nodes of the cell shown in FIG. 2;

FIG. 4 is a block diagram showing the processing of a frequency characteristic calculation block according to a first embodiment of the present invention;

FIGS. 5A to 5D are illustrations for describing a processing image according to the first embodiment of the present invention;

FIG. 6 is a flowchart of processing of a current waveform calculation according to the first embodiment;

FIG. 7 is a block diagram showing the processing of a frequency characteristic calculation block according to a second embodiment of the present invention;

FIGS. 8A through 8D are illustrations for describing a processing image pertaining to the second embodiment;

FIG. 9 is a flowchart of processing of a current waveform calculation according to the second embodiment;

FIG. 10 is a block diagram showing a portion of a circuit used in a third embodiment of the present invention;

FIG. 11 is a graph showing signal waveforms of each path;

FIG. 12 is a block diagram showing a frequency characteristic calculation block according to a third

15

embodiment of the present invention;

FIGS. 13A through 13C are illustrations showing a processing pertaining image to the third embodiment;

FIG. 14 is a flowchart of current waveform calculation processing according to the third embodiment;

FIG. 15 is a flowchart for describing a known EMI analysis method; and

FIG. 16 is a flowchart for describing a method of analyzing EMI dynamic at gate-level.

Description of the preferred Embodiments

An electromagnetic interference analysis method according to preferred embodiments of the present invention will now be described by reference to the accompanying drawings. As shown in FIG. 1, an EMI analysis method according to the present invention is characterized in:

calculating the transition probability of a node from a netlist 1 and a transition probability 2, through use of a propagation probability method, and calculating a static delay 4 through use of a static delay analysis method, to thereby derive a calculated probability/delay 5 of a node;

estimating the waveform 6 of an electric current on the basis of the probability/delay 5 and information 3 concerning the waveform of an electric signal at the time of toggling, to thereby derive a current waveform estimation result 7; and

subjecting the current waveform estimation result 7 to

a fast Fourier transformation 8 (hereinafter called an "FFT"),
thereby determining a frequency characteristic 9 of the
waveform.

(First Embodiment)

5   A method of analyzing electromagnetic interference
according to a first embodiment of the present invention will
be described hereinbelow. As can be seen from a schematic
diagram shown in FIG. 1, under an EMI analysis method according
to the present embodiment,

10   the quantity of electromagnetic interference developing in an
LSI is to be analyzed on the basis of a transient probability
and static delay propagation data, provided that a waveform
shown in FIG. 3A appears in a node A of a flip-flop (FF) cell
and a waveform shown in FIG. 3B appears in a node B of the FF

15   cell (where FIG. 3B is an enlarged view of about 1.5 cycles
of the signal designated by braces in FIG. 3A) when a clock
signal CLK is input to a circuit shown in FIG. 2. Here, the
transition probability of a node is calculated from a
previously-prepared netlist 1 and a transition probability 2.

20   Further, a static delay 4 in a current estimation waveform per
change is calculated. The amplitude of a current waveform is
corrected in consideration of information 3 concerning the
waveform of an electric current arising at the time of a
predetermined toggling operation. Provided that the

25   corrected current waveform arises at a time at which a signal

17

arrives at the respective node, the current waveforms which appear at all nodes during a period of time corresponding to one cycle are added (the current waveform estimation processing 6). The current waveform estimation result 7 determined through addition is subjected to the FFT processing 8, thereby determining the frequency characteristic 9 of EMI components of a circuit to be analyzed.

FIG. 4 is a block diagram for describing the overall flow of processing of the EMI analysis method according to the present embodiment. FIGS. 5A through 5D are illustrations showing the principle underlying the processing. In a netlist 401, a circuit which is an object of EMI analysis is represented as circuit data. Delay information 405 concerning each node is formed from the netlist 401 through static delay calculation 403 (see FIG. 5A). Transition probability information 406 concerning each node is formed from the netlist 401 and input transition probability 402, through propagation probability 404 (see FIG. 5B). In consideration of a triangular waveform whose area corresponds to the quantity of electric current derived by means of multiplying current waveform information by probability information, an average current waveform 409 is formed by average current waveform calculation means 408 from element current waveform information 407 concerning each node (see FIG. 5C) and the delay information 405. The thus-determined average current waveform 409 is taken as

18

average current waveform information (see FIG. 5D). The average current waveform information is subjected to FFT processing 410, thereby deriving frequency characteristic information 411.

5   FIG. 6 shows a flowchart of processing of the average current waveform calculation means 408. The average current waveform calculation means 408 reads element current waveform information from a table (step 1250) and performs a current waveform calculation loop (step 1251). The base of a

10   triangular waveform of an instance to be processed is extracted from an output slew (step 1252). The area of the triangular waveform is taken as being derived by means of multiplying $W \times \dfrac{h}{2}$ by transition probability per cycle, and I is taken as the value of the area of the triangular waveform. The height "h" of the

15   triangular waveform is calculated from transition probability per $\dfrac{2 \times I}{W \times 1}$ cycle (step 1253), wherein "I" denotes the quantity of electric current flowing in a cell of an event which is an object of processing. This processing corresponds to processing performed by a triangular waveform shaping section.

20   Until variable "x" changes from 0 to W/2, h(c, i) expressed (by Eq.5) is added to I(t+x) and I(t−x). Further, Δt is added to variable "x" (steps 1254 and 1255). Here, I(t+x) denotes total electric current flowing through all the cells at time

19

t+x, and I(t-x) denotes total electric current flowing through all the cells at time t-x.

The frequency characteristic of a circuit to be analyzed can be determined in the manner as mentioned previously, and 5 a designer can analyze EMI which would arise in a circuit of interest.

According to the EMI analysis method, a current waveform is modeled through an averaging operation, on the basis of static delay information and propagation probability 10 information. The thus-obtained model is subjected to FFT processing, thereby analyzing EMI of a circuit. The EMI analysis method can analyze EMI components within a shorter period of time than can a known gate-level dynamic analysis method.

15 In a case where performance of EMI analysis for each path of a circuit is desired, static delay information concerning each path is given.

In the present embodiment, electric currents of all nodes in a circuit to be analyzed are added. However, so long as 20 the number of nodes whose electric currents are to be added is controlled in accordance with the magnitude of an electric current or the frequency of probability, processing time can be shortened further.

(Second Embodiment)

25 Next will be described an EMI analysis method according

20

to a second embodiment of the present invention. As represented by a flowchart shown in FIG. 7, the present EMI analysis method is characterized in employing random current waveform estimation means 708 in lieu of the average current

5   waveform calculation means 408 employed in the first embodiment, and utilizing random current waveform information in lieu of the average current waveform information. In other respects, the EMI analysis method according to the present embodiment is identical in configuration with that described in connection

10   with the first embodiment.

FIG. 7 a block diagram for describing the overall flow of processing of the EMI analysis method according to the present embodiment. FIGS. 8A through 8D are illustrations showing the principle underlying the processing. In a netlist

15   701, a circuit which is an object of EMI analysis is represented as circuit data. Delay information 705 concerning each node is formed from the netlist 701 through static delay calculation 703 (see FIG. 8A). Transition probability information 706 concerning each node is formed from the netlist 701 and input

20   transition probability 702, through propagation probability 704 (see FIG. 8B). On the basis of element current waveform information 707 concerning each node (FIG. 8C) and operating frequency information 712, random waveform estimation means 708 produces random current waveform information 709 (see FIG.

25   8D) within a plurality of predetermined cycles. The thus-

produced random current waveform information 709 is subjected
to FFT processing 710, thereby deriving frequency
characteristic information 711.

FIG. 9 shows a flowchart of processing of the random
current waveform estimation means 708. The average current
waveform estimation means 708 reads element current waveform
information from a table (step 1280) and performs a current
waveform calculation loop (step 1281). The average current
waveform estimation means 708 performs loop processing until
valuable "y" changes from 1 to the value of a frequency. (step
1282). The following processing is iterated until calculation
of a current waveform is completed. A determination is made
as to whether or not a random number is smaller than the value
of probability (step 1283). If a random number is smaller,
the base of a triangular waveform of an instance to be processed
is extracted from an output slew (step 1284). At this time,
the area of the triangular waveform is defined as $W \times \dfrac{h}{2}$, and
I is the value of the area of the triangular waveform. The
height "h" of the triangular waveform is calculated by $2 \times \dfrac{I}{W}$
(step 1285), wherein "I" denotes the quantity of electric
current flowing in a cell of an event which is an object of
processing. This processing corresponds to processing
performed by a triangular waveform shaping section. Until

22

variable "x" changes from 0 to W/2, h(c, i) expressed (by Eq.5) is added to I(t+x) and I(t−x). Further, Δt is added to variable "x" (steps 1286 and 1287). Here, I(t+x) denotes total electric current flowing through all the cells at time t+x, and I(t−x) denotes total electric current flowing through all the cells at time t−x.

The frequency characteristic of a circuit to be analyzed can be determined in the manner as mentioned previously, and a designer can analyze EMI which would arise in a circuit of interest.

According to the EMI analysis method, a current waveform is modeled through a random current waveform operation, on the basis of static delay information and propagation probability information. The thus-obtained model is subjected to FFT processing, thereby analyzing EMI of a circuit. The EMI analysis method can analyze EMI components with high accuracy within a shorter period of time than a known gate-level dynamic analysis method.

In a case where performance of EMI analysis for each path of a circuit is desired, static delay information concerning each path is given.

In the present embodiment, electric currents information of all nodes in a circuit to be analyzed are added. However, so long as the number of nodes whose electric currents are to be added is controlled in accordance with the magnitude of an

electric current or the frequency of probability, processing
time can be shortened further.

(Third Embodiment)

An EMI analysis method according to a third embodiment
5   of the present invention will now be described. In the
previously-described first and second embodiments, delay
information and probability information are prepared
separately. Information is derived by means of multiplying
waveform information which is obtained as element current
10 waveform information, by probability information. The
thus-obtained information is added to a delay time of each node.
In contrast, in the present embodiment, delay propagation
probability information is formed from delay propagation
probability information. Delay/transition probability is
15 calculated from the delay propagation probability information,
and element waveform information is added to the thus-
calculated delay/transition probability.

In this way, more realistic current waveform information
is calculated, and the result of current waveform calculation
20 is subjected to FFT processing, thereby determining the
frequency characteristic of an EMI component of a circuit to
be analyzed. Thus, EMI of the circuit is analyzed. As can be
seen from an enlarged view shown in FIG. 10, the present
embodiment is directed particularly a case where a plurality
25 of paths are provided in a composite cell. FIG. 11 shows delay

24

transition information concerning propagation of a signal in each of the paths of the composite cell shown in FIG. 10. FIG. 11 shows delay transition probability information as one example. As can be seen from FIG. 11, there is obtained node
5 information concerning a plurality of paths, and mean current waveform information is formed from the node information.

FIG. 12 is a block diagram for describing the overall flow of processing of the EMI analysis method according to the present embodiment. FIGS. 13A through 13C are illustrations
10 showing the principle underlying the processing. FIG. 14 is a flowchart of average current waveform calculation means used in the processing. In a netlist 901, a circuit which is an object of EMI analysis is represented as circuit data. Delay/transition probability 906 of each node is calculated
15 from the netlist 901 and input transition probability 902, on the basis of delay/propagation probability 904 (see FIG. 13A). Mean current waveform estimation means 908 produces mean current waveform information 909 (see FIG. 13C), in consideration of a triangular waveform whose area is determined
20 by the quantity of electric current, such that the delay/transition probability 906 is multiplied by element current waveform information 907 (see FIG. 13B). The thus-formed mean current waveform information 909 is subjected to FFT processing 910 within a time domain which is determined
25 on the basis of operating frequency information 912, thereby

25

obtaining frequency characteristic information 911.

FIG. 14 shows a flowchart of processing of the average current waveform calculation means. The average current waveform calculation means reads element current waveform information from a table (step 1310) and performs a current waveform calculation loop (step 1311). The following processing is iterated until calculation of a current waveform is completed. The delay/transition probability 906 calculated from delay information and transition probability information is multiplied by element current waveform information 907 (see FIG. 13B) (step 1312). In consideration of a triangular waveform whose area is determined by the quantity of electric current, average electric current waveform estimation means 908 adds the result of multiplication as mean current, thereby deriving average current waveform information 909. The average current waveform information 909 is subjected to FFT processing 910, thereby determining frequency characteristic information 911.

The frequency characteristic of a circuit to be analyzed can be determined in the manner as mentioned previously, and a designer can analyze EMI, which would arise in a circuit of interest.

26

According to the EMI analysis method, delay propagation probability information is formed from static delay information and propagation probability information, and average current waveform information is formed from the delay

5   propagation probability information. The thus-obtained average current waveform information is subjected to FFT processing, thereby enabling highly-accurate EMI analysis. The EMI analysis method can analyze EMI components within a shorter period of time than can a known gate-level dynamic

10   analysis method.

In addition to a distribution taking into consideration a path, a temperature/process/voltage distribution may be conceived as the delay/transition probability information

15   shown in FIG. 13A.

In the foregoing embodiments, FFT processing has been used for analyzing a frequency. However, the present invention is not limited to FFT processing. Needless to say,

20   another processing method, such as ordinary Fourier transformation, may alternatively be employed.

The present invention can materialize evaluation of EMI

25   developing in an LST through a simulation, by means of

27

highly-accurately analyzing through static processing,
variation in power-supply current which may be said to
primarily account for EMI. Further, in contrast with dynamic
analysis of EMI which is embodied by a gate-level simulation
5   or a like simulation, the present EMI analysis method can
prevent an increase in processing time.

What is claimed is:

1. A method of analyzing electromagnetic interference developing in an LSI, comprising:

a correction step of correcting the amplitude of a current estimation waveform in each node which has been previously prepared for each change in each node, in accordance with the probability of variation in each node;

an addition step of adding current waveforms of all nodes together within a period of time corresponding to one cycle, provided that the thus-corrected current waveform appears at a time a signal arrives at each node; and

a frequency analysis step of analyzing the frequency of the current waveform calculated in the addition step.

2. The method of analyzing electromagnetic interference developing in an LSI according to claim 1, wherein the correction step includes a step of correcting the amplitude of a current estimation waveform, which has been prepared for each change in each node, in accordance with the probability of variation in each node and a distribution with respect to time.

3. The method of analyzing electromagnetic interference developing in an LSI according to claim 1, wherein each node has a plurality of signal transmission paths (hereinafter referred to simply as "paths"), and each of the current waveforms is calculated in consideration of a case where each

of the paths has a unique probability of change and signal arrival time.

4. The method of analyzing electromagnetic interference developing in an LSI according to claim 2, wherein each node has a plurality of paths, and each of the current waveform is calculated in consideration of a case where each of the paths has a unique probability of change and signal arrival time.

5. A method of analyzing electromagnetic interference developing in an LSI, the method comprising:

a waveform formation step of forming a current estimation waveform which has been prepared for each change in each node, as if the waveform randomly arises within a plurality of predetermined cycles, in accordance with the probability of change in each node and a time at which a signal arrives at each node;

adding the thus-prepared current estimation waveforms of all nodes, to thereby derive a current waveform; and

analyzing the frequency of the current waveform, thereby determining a noise characteristic of EMI.

6. The method of analyzing electromagnetic interference developing in an LSI according to claim 5, wherein each node has a plurality of paths, and a current waveform is calculated in consideration of a case where each of the paths has a unique probability of change and signal arrival time.

7. A method of analyzing electromagnetic interference

30

developing in an LSI, the method comprising:

a waveform formation step of forming a current estimation waveform which has been prepared for each change in each node, as if the waveform randomly arises within a plurality of

5   predetermined cycles, in accordance with the probability of change in each node and a distribution probability of time;

adding the thus-prepared current estimation waveforms of all nodes, to thereby derive a current waveform; and

analyzing the frequency of the current waveform, thereby

10 determining a noise characteristic of EMI.

8. The method of analyzing electromagnetic interference developing in an LSI according to claim 7, wherein each node has a plurality of paths, and a current waveform is calculated in consideration of a case where each of the paths has a unique

15 probability of change and signal arrival time.

Abstract

In contrast with a known dynamic gate-level simulation method,

a method of analyzing electromagnetic interference (an EMI

5   analysis method) according to the present invention enables

estimation of EMI noise, by means of calculating signal

propagation of each node through use of the signal propagation

probability technique, and calculating variation time of each

node through use of "the Static timing analysis technique".

10   In short, the present invention is characterized in calculating

a frequency characteristic from the relationship between

toggle probability of each node and delay in each node.

32

Fig.1

```
┌──────────┐   ┌──────────┐   ⎛ トグル時の ⎞
│ネットリスト│   │ 遷移確率 │   │ 波形情報  │
└──────────┘   └──────────┘   ⎝          ⎠
         1            2               3
```

```
┌──────────────┐   ┌──────────┐   ┌──────────────┐
│ 確率伝播及び  │   │ 各ノードの │   │ 電流波形     │
│ 静的遅延計算  │──▶│ 確率・遅延 │──▶│ 推定処理部   │
└──────────────┘   └──────────┘   └──────────────┘
        4              5                  6
```

```
┌──────────────┐
│ 電流波形     │
│ 推定結果     │
└──────────────┘
        7
```

```
┌──────────────┐
│ FFT処理部    │
└──────────────┘
        8
```

```
┌──────────────┐
│ 周波数特性   │
└──────────────┘
        9
```

Fig.2.

Fig.3A

CLK

A

B

(B)

時間
time

Fig.3B

CLK

A

B

時間
Time

遅延
delay

遅延
delay
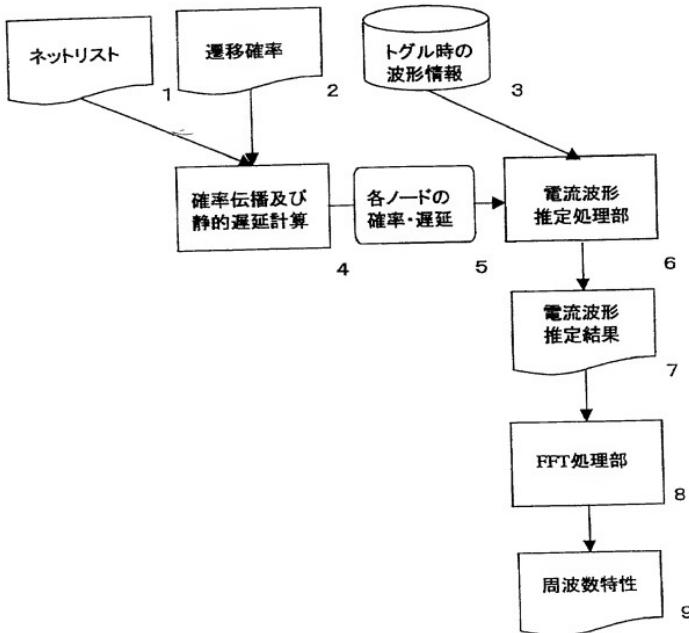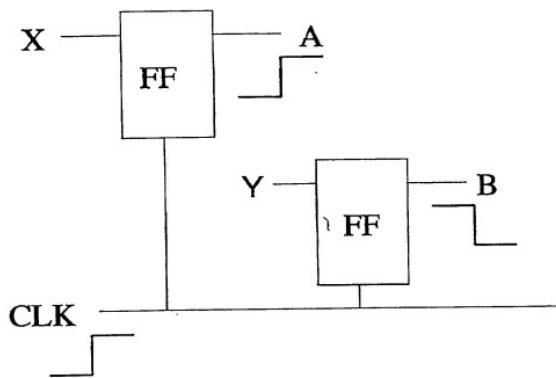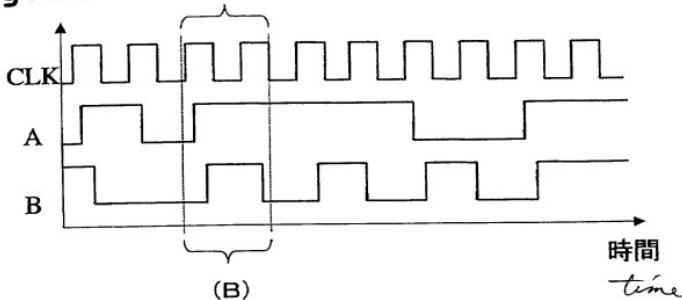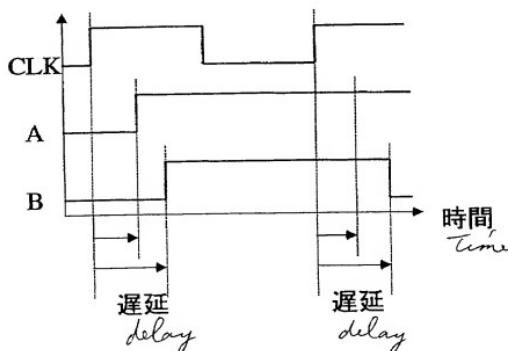
Fig.4.
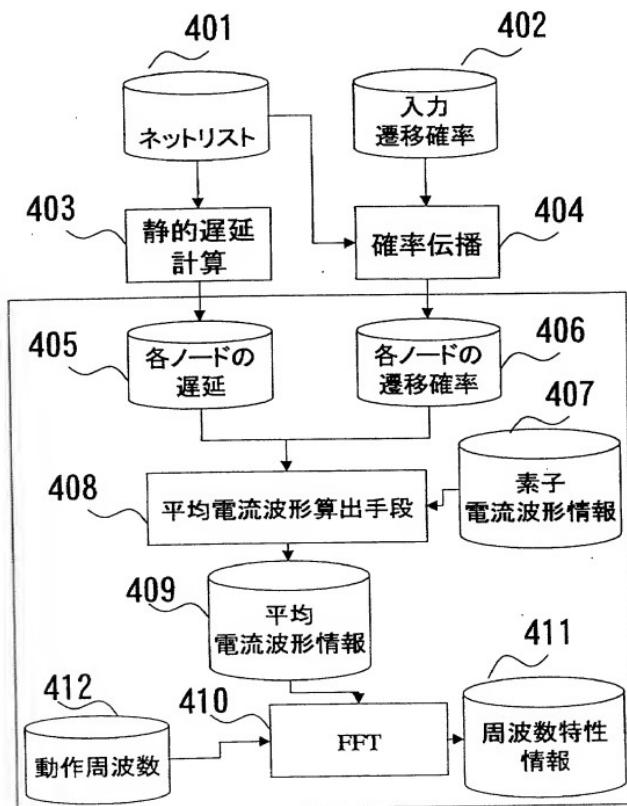
Fig.5A
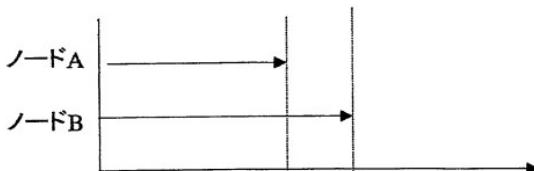
(a)遅延情報

ノードA

ノードB

Fig.5B　確率情報

ノードA　　　　ノードB

50%　　　　　80%

Fig.5C　素子電流波形情報

ノードA　　　　ノードB

hb

ha　　　　　　　　　　　　　×掛ける

Fig.5D　平均電流波形情報

電流　　　　hb×0.8

遅延に
合わせて
足し込む

ha×0.5

時刻
time

Fig.6

平均電流波形算出手段処理フロー図

| 素子電流波形情報読み込み | 1250 |

| 電流波形算出処理ループ | 1251 |

| 出力スリューから処理対象
インスタンスの三角波底辺(=w)を抽出 | 1252 |

| h=2×I/w×1周期あたり遷移確率 | 1253 |

| x = 0 → w/2 | 1254 |

$$I(t+x) = I(t+x) - \frac{2 \times h}{w} x + h$$

$$I(t-x) = I(t-x) - \frac{2 \times h}{w} x + h$$

1255

| x = x + Δt |

Fig.7

Fig.8A遅延情報

ノードA ────────→

ノードB ──────→

Fig.8B 確率情報

ノードA　　　ノードB

50%　　　　80%

Fig.8C 素子電流波形情報

ノードA　　　ノードB

確率に
合わせて
各周期に
ランダムに
足し込む

Fig.8D　ランダム電流波形情報

電流
current

動作周波数情報

時刻
time
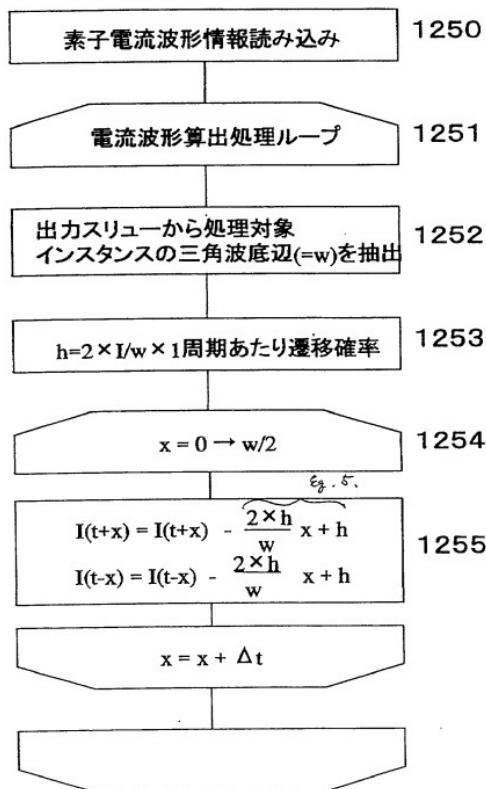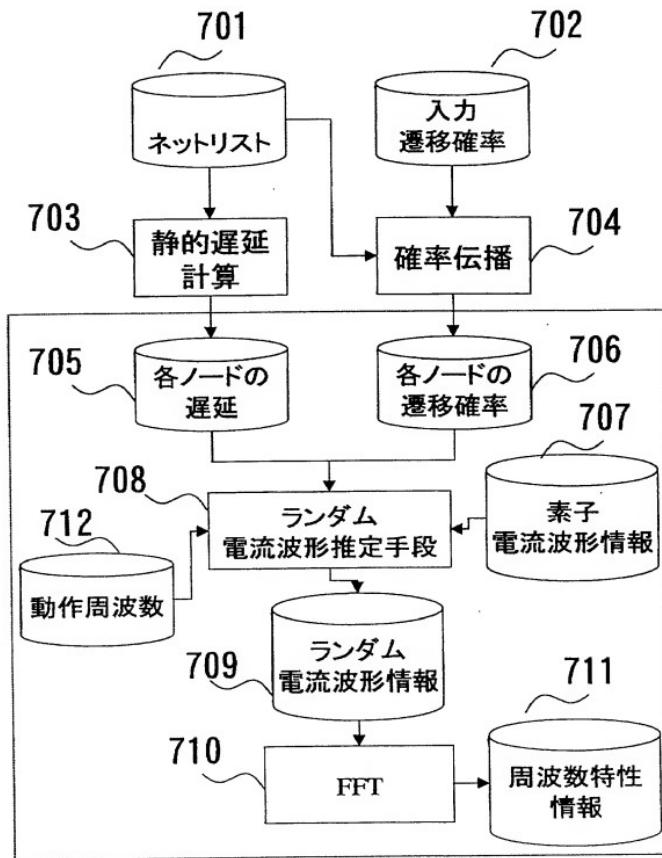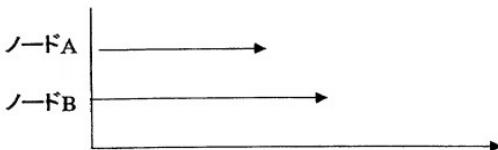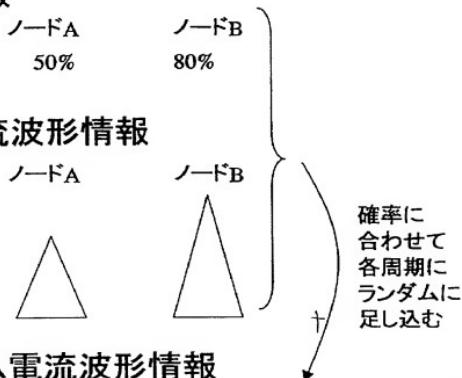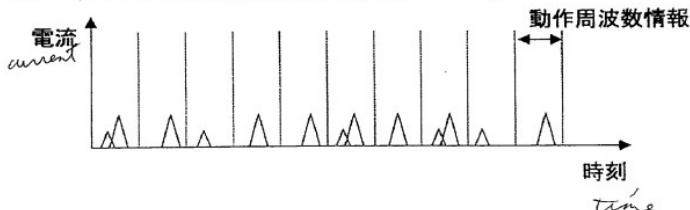
Fig.9

ランダム電流波形算出手段処理フロー図

```
┌─────────────────────────────┐
│     素子電流波形情報読み込み          │  1280
└─────────────────────────────┘
          ↓
╱─────────────────────────────╲
│      電流波形算出処理ループ           │  1281
╲─────────────────────────────╱
          ↓
┌─────────────────────────────┐
│         y=1→周期数               │  1282
└─────────────────────────────┘
          ↓
◇─────────────────────────────◇
│         乱数<=確率                │  1283
◇─────────────────────────────◇
          ↓
┌─────────────────────────────┐
│   出力スリューから処理対象            │  1284
│   インスタンスの三角波底辺(=w)を抽出    │
└─────────────────────────────┘
          ↓
┌─────────────────────────────┐
│         h=2×I/w                │  1285
└─────────────────────────────┘
          ↓
╱─────────────────────────────╲
│         x = 0 → w/2            │  1286
╲─────────────────────────────╱
          ↓
┌─────────────────────────────┐
│                              │  1287
└─────────────────────────────┘
```

$$I(t+x) = I(t+x) - \frac{2 \times h}{w} x + h$$

$$I(t-x) = I(t-x) - \frac{2 \times h}{w} x + h$$

$$x = x + \Delta t$$

$$y = y + 1$$
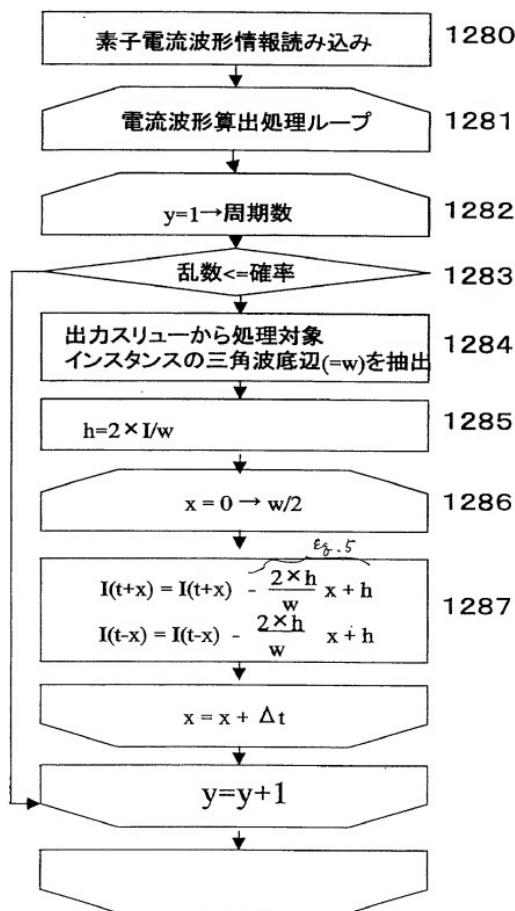
Fig.10
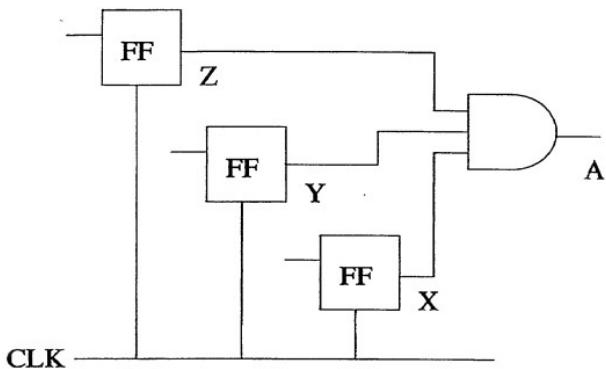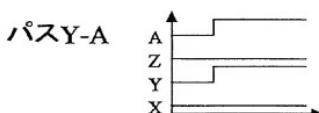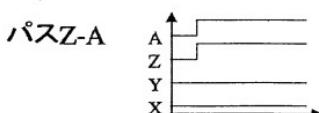
Fig.11

複数パス毎の遅延・
遷移確率情報を盛り
込む。
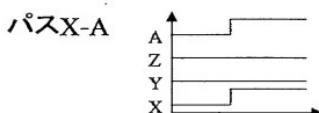
Fig.12
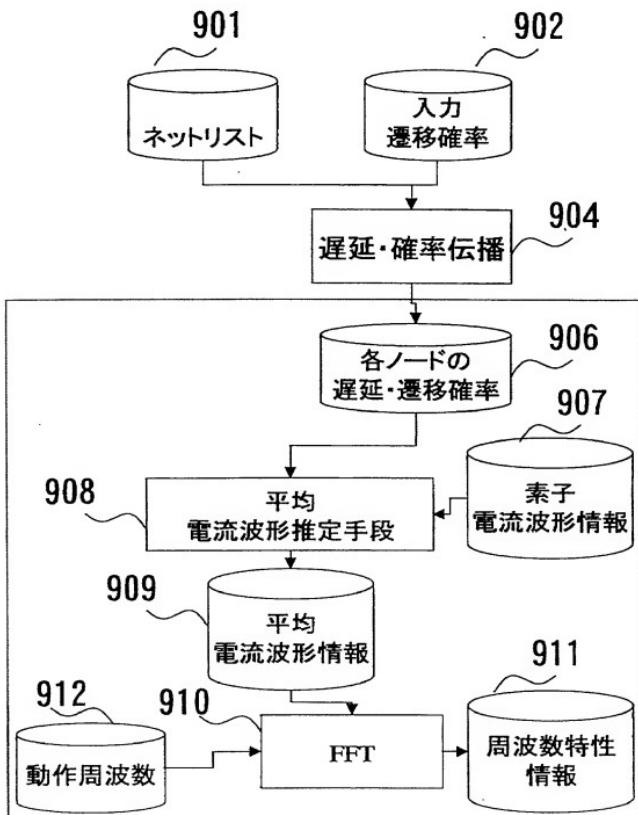
Fig.13A 遅延・遷移確率情報
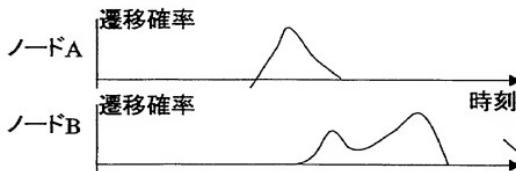
ノードA　遷移確率

時刻

ノードB　遷移確率

時刻

Fig.13B 素子電流波形情報

ノードA　　　　ノードB

×掛ける

Fig.13C 平均電流波形情報

電流

時刻

足し込む

Fig.14

平均電流波形算出手段処理フロー図

| 素子電流波形情報読み込み | 1310 |

| 電流波形算出処理ループ | 1311 |

| 遅延・遷移確率情報に素子電流波形情報を掛け合わせる。 | 1312 |

| 平均電流に足し込む | 1313 |

Fig.15

Fig.16

```
┌─────────┐  ┌─────────┐   ╭─────────╮
│ ネットリスト │  │ テストベクタ │   │ トグル時の │
└─────────┘  └─────────┘   │ 波形情報  │
       101        102      ╰─────────╯
                               103
```

電流波形
算出処理部

論理シミュレータ ─ イベント情報

104　　　105　　　　107

電流波形
算出結果

シミュレーション
結果

108

106

FFT処理部

109

周波数特性

110
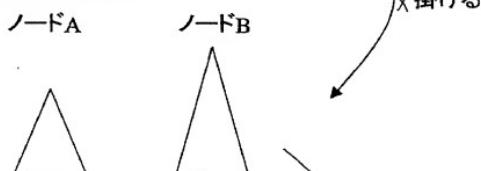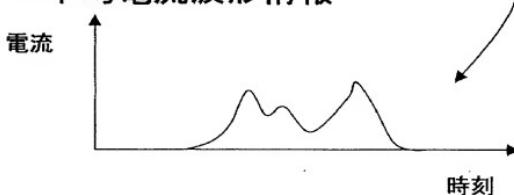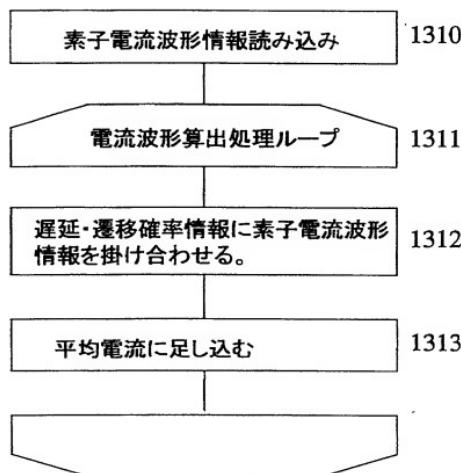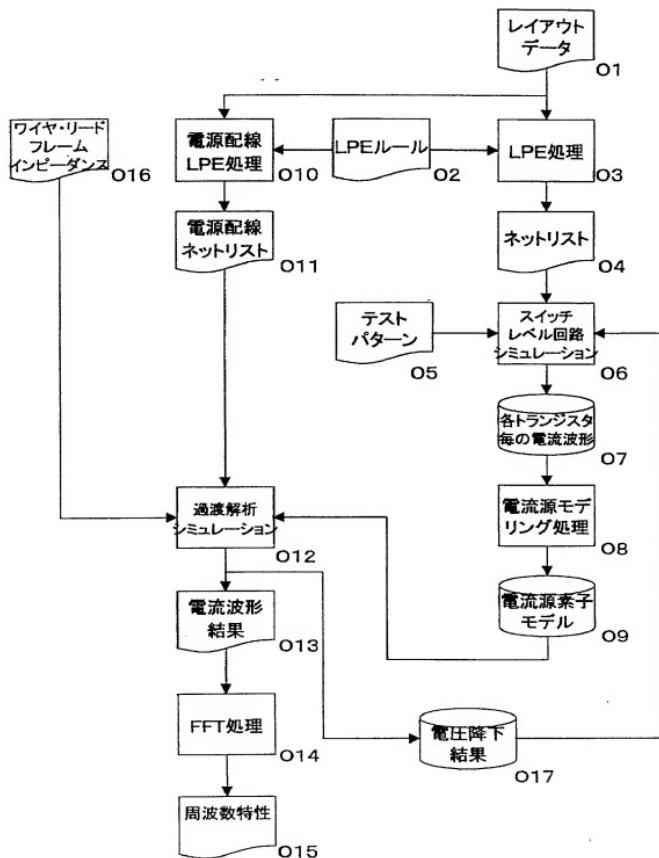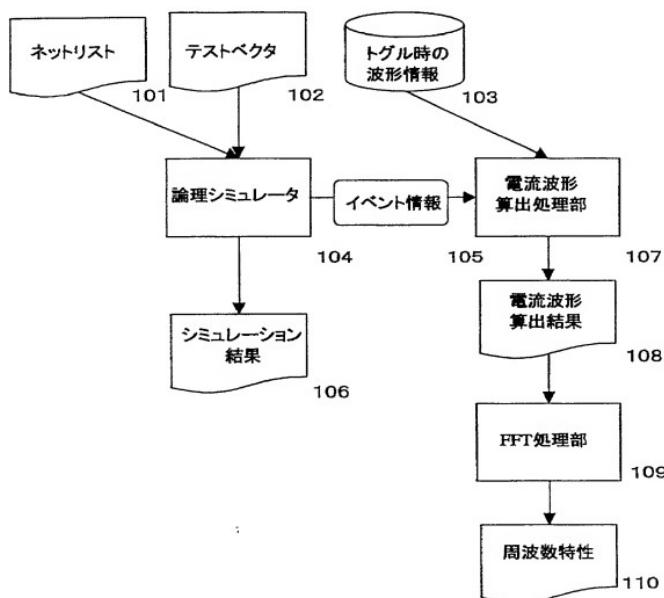
[DESIGNATION OF DOCUMENT] DRAWINGS

[FIG. 1]

1 NETLIST

2 TRANSITION PROBABILITY

3 WAVEFORM INFORMATION FORMED AT THE TIME OF TOGGLING

4 PROPAGATION PROBABILITY AND CALCULATION OF STATIC DELAY

5 PROBABILITY AND DELAY OF RESPECTIVE NODE

6 CURRENT WAVEFORM ESTIMATION SECTION

7 CURRENT WAVEFORM ESTIMATION RESULT

8 FFT PROCESSING SECTION

9 FREQUENCY CHARACTERISTIC

[FIG. 3A]

TIME

[FIG. 3B]

DELAY, DELAY, TIME

[FIG. 4]

401 NETLIST

402 INPUT TRANSITION PROBABILITY

403 STATIC DELAY CALCULATION

404 PROPAGATION PROBABILITY

405 DELAY OF RESPECTIVE NODE

406 TRANSITION PROBABILITY OF RESPECTIVE NODE

407 ELEMENT CURRENT WAVEFORM INFORMATION

16

408 AVERAGE CURRENT WAVEFORM CALCUALTION MEANS

409 AVERAGE CURRENT WAVEFORM INFORMATION

411 FREQUENCY CHARACTERISTIC INFORMATION

412 OPERATING FREQUENCY

[FIG. 5A]

DELAY INFORMATION

NODE A, NODE B

[FIG. 5B]

PROBABILITY INFORMATION

NODE A, NODE B

[FIG. 5C]

ELEMENT CURRENT WAVEFORM INFORMATION

NODE A, NODE B

MULTIPLIED BY

[FIG. 5D]

AVERAGE CURRENT WAVEFORM INFORMATION

CURRENT, TIME

ADD INFORMATION TO DELAY TIME

[FIG. 6]

FLOWCHART OF AVERAGE CURRENT WAVEFORM CALCULATION PROCESSING

1250 READ ELEMENT CURRENT WAVEFORM INFORMATION

1251 CURRENT WAVEFORM CALCULATION LOOP

1252 EXTRACT, FROM OUTPUT SLEW DATA, THE BASE OF TRIANGULAR WAVEFORM

17

(=w) OF AN INSTANCE TO BE PROCESSED

1253 TRANSITION PROBABILITY PER h=2 X I/2 X 1

[FIG. 7]

701 NETLIST

702 INPUT TRANSITION PROBABILITY

703 STATIC DELAY CALCULATION

704 PROPAGATION PROBABILITY

705 DELAY OF RESPECTIVE NODE

706 TRANSITION PROBABILITY OF RESPECTIVE NODE

707 ELEMENT CURRENT WAVEFORM INFORMATION

708 RANDOM CURRENT WAVEFORM CALCUALTION MEANS

709 RANDOM CURRENT WAVEFORM INFORMATION

711 FREQUENCY CHARACTERISTIC INFORMATION

712 OPERATING FREQUENCY

[FIG. 8A]

DELAY INFORMATION

NODE A, NODE B

[FIG. 8B]

PROBABILITY INFORMATION

NODE A, NODE B

[FIG. 8C]

ELEMENT CURRENT WAVEFORM INFORMATION

NODE A, NODE B

18

RANDOMLY ADD INFORMATION TO RESPECTIVE CYCLE IN ACCORDANCE WITH

PROBABILITY

[FIG. 8D]

RANDOM CURRENT WAVEFORM INFORMATION

CURRENT, TIME

OPERATING FREQUENCY INFORMATION

[FIG. 9]

FLOWCHART OF RANDOM CURRENT WAVEFORM CALCULATION PROCESSING

1280 READ ELEMENT CURRENT WAVEFORM INFORMATION

1281 CURRENT WAVEFORM CALCULATION LOOP

1282 PERFORM LOOP PROCESSING UNTIL y=1 ASSUMES THE VALUE OF A FREQUENCY

1283 DETERMINE WHETHER OR NOT A RANDOM NUMBER IS SMALLER THAN THE VALUE

OF PROBABILITY

1284 EXTRACT, FROM OUTPUT SLEW DATA, THE BASE OF TRIANGULAR WAVEFORM

(=w) OF AN INSTANCE TO BE PROCESSED

[FIG. 11]

ADD DELAY AND TRANSITION PROBABILITY INFORMATION UNIQUE TO EACH OF

PATHS TO DELAY TRANSITION PROBABILITY INFORMATION

delay transition probability information

[FIG. 12]

901 NETLIST

902 INPUT TRANSITION PROBABILITY

903 DELAY AND PROPAGATION PROBABILITY

906 DELAY AND TRANSITION PROBABILITY OF RESPECTIVE NODE

907 ELEMENT CURRENT WAVEFORM INFORMATION

908 AVERAGE CURRENT WAVEFORM ESTIMATION MEANS

909 AVERAGE CURRENT WAVEFORM INFORMATION

911 FREQUENCY CHARACTERISTIC INFORMATION

912 OPERATING FREQUENCY

[FIG. 13A]

DELAY/TRANSITION PROBABILITY INFORMATION

NODE A, NODE B

TRANSITION PROBABILITY

TIME

[FIG. 13B]

ELEMENT CURRENT WAVEFORM INFORMATION

NODE A, NODE B

MULTIPLY

[FIG. 13C]

AVERAGE CURRENT WAVEFORM INFORMATION

ADD

CURRENT, TIME

[FIG. 14]

FLOWCHART OF PROCESSING PERTAINING TO AVERAGE CURRENT WAVEFORM

CALCULATION MEANS

20

1310 READ ELEMENT CURRENT WAVEFORM INFORMATION

1311 CURRENT WAVEFORM CALCULATION LOOP

1312 MULTIPLY DELAY/TRANSITION PROBABILITY INFORMATION BY CURRENT

WAVEFORM INFORMATION

1313 ADD RESULTANT INFORMATION TO AVERAGE CURRENT

[FIG. 15]

O1 LAYOUT DATA

O2 LPE RULE

O3 LPE PROCESSING

O4 NETLIST

O5 TEST PATTERN

O6 SWITCH-SCALE CIRCIT SIMULATION

O7 CURRENT WAVEFORM OF RESPECTIVE TRANSISTOR

O8 MODELING OF CURRENT SOURCE

O9 MODELING OF CURRENT-SOURCE ELEMENT

O10 POWER LINE LPE PROCESSING

O11 POWER LINE NETLIST

O12 TRANSITION ANALYSIS SIMULATION

O13 CURRENT WAVEFORM RESULT

O14 FFT PROCESSING

O15 FREQUENCY CHARACTERISTIC

O16 WIRE/LEADFRAME IMPEDANCE

O17 VOLTAGE DROP RESULT

[FIG. 16]

101 NETLIST

102 TEST VECTOR

103 WAVEFORM INFORMATION FORMED AT THE TIME OF TOGGLING

104 LOGIC SIMULATOR

105 EVENT INFORMATION

106 SIMULATION ERSULT

107 CURRENT WAVEFORM CALCULATION SECTION

108 CURRENT WAVEFORM CALCULATION RESULT

109 FFT PROCESSING

110 FREQUENCY CHARACTERISTIC

22

COMBINED DECLARATION AND POWER OF ATTORNEY
IN ORIGINAL APPLICATION
(Sole or Joint - Foreign)

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe that I am the original, first and sole inventor (if only one name is listed below) or an original, first, and joint inventor (if plural inventors are named below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

METHOD OF ANALYZING ELECTROMAGNETIC INTERFERENCE ,

the specification of which

XX   is attached hereto.

____   was filed on _____ as application Serial No. _____ and
         was amended on _____.

I hereby state that I have reviewed and understand the content of the above-identified specification, including the claims (Pearne, Gordon, McCoy & Granger Docket No. 32809), as amended by any amendment referred to above. I acknowledge my duty to disclose information of which I am aware which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119, of any foreign application(s) for patent or inventor's certificate listed below, and have also identified below any foreign applications for patent or inventor's certificate having a filing date before that of the application on which priority is claimed.

Country	Application Number	Filing Date (day/month/year)	Priority Claimed? Yes	No
Japan	P.Hei.11-200847	14/July/1999	XX	

I hereby designate the following as my mailing address and telephone number:

Pearne, Gordon, McCoy & Granger
1200 Leader Building
Cleveland, Ohio 44114
(216) 579-1700

and appoint each of the following as my attorneys with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

Charles B. Gordon, Reg. No. 16923
William C. McCoy, Reg. No. 16885
Richard H. Dickinson, Jr., Reg. No. 18622
Thomas P. Schiller, Reg. No. 20677
David B. Deioma, Reg. No. 22841
Joseph J. Corso, Reg. No. 25845
Howard G. Shimola, Reg. No. 26232
Jeffrey J. Sopko, Reg. No. 27676

John P. Murtaugh, Reg. No. 34226
James M. Moore, Reg. No. 32923
David E. Spaw, Reg. No. 34732
Michael W. Garvey, Reg. No. 35878
Mark E. Bandy, Reg. No. 35788
Paul R. Katterle, Reg. No. 36563
Richard M. Mescher, Reg. No. 38242

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

(1)   Inventor (sole or joint):   Kenji SHIMAZAKI

Citizenship: Japan

Signature _____ *Kenji Shimazaki* _____

Date _____ July 7, 2000 _____

Residence: Hyogo, Japan

Post Office Address: 8-11-14-603, Shimoyamatedori, Chuou-ku, Kobe-shi,
                        Hyogo, Japan

2

(2) Inventor (joint): Hiroyuki TSUJIKAWA

Citizenship: Japan

Signature _____ *Hiroyuki Tsujikawa* _____

Date ____ July 7, 2000 _____

Residence: Shiga, Japan

Post Office Address: 1496-2, Kusatsu-cho, Kusatsu-shi, Shiga, Japan

(3) Inventor (joint): Seijirou KOJIMA

Citizenship: Japan

Signature _____ *Seijirou Kojima* _____

Date ____ July 7, 2000 _____

Residence: Kyoto, Japan

Post Office Address: 156-6, Yodohizume-cho, Fushimi-ku, Kyoto-shi, Kyoto, Japan

(4) Inventor (joint): Shouzou HIRANO

Citizenship: Japan

Signature _____ *Shouzou Hirano* _____

Date ____ July 7, 2000 _____

Residence: Osaka, Japan

Post Office Address: 3-5, Tougu-cho, Ibaraki-shi, Osaka, Japan

3